

SF SONIC™

Prima

PURE SINE WAVE HOME UPS



24 MONTH WARRANTY*

*Conditions Apply

ALL INDIA
SERVICE
NETWORK

SF SONIC
POWERLINE
1800 102 6060

POWER A CHILD'S LIFE
RETURN USED BATTERIES


SF SONIC
BATTERIES

In association with
unicef



www.facebook.com/SFSonicBatteries | www.sfsonicpower.com

SF Sonic presents the full range of storage power solutions manufactured at its state of art factories. The rugged power packed range starts from cars, SUVs, trucks, tractors, construction vehicles, two wheelers and extends to batteries for e-rickshaws, gensets, inverters and solar applications. Whatever the application SF Sonic ensures that you not only get the fail safe reliability of new age technology but also more power per crank, year after year.

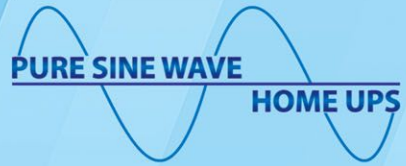

FEATURES:

- Advance Pure Sine Wave generation Technology
- LED Display for better user Interface
- Low Mains Voltage Charging facility i.e. 8-10Amp charging current at 120V mains Input
- Integrated cooling control system
- Huge power saving
- Easy serviceability
- Dual Mode of Charging
- Fast Changeover Time Mains to UPS or vice versa i.e. <10msec
- **Fast Charging Technique i.e.**
 - SF SONIC PRIMA 700 : HC - 15Amp +/- 1Amp & NC - 11Amp +/- 1Amp
 - SF SONIC PRIMA 900 : HC - 18 Amp +/- 1Amp & NC - 13Amp +/- 1Amp
 - SF SONIC PRIMA 1500 : HC - 18Amp +/- 1Amp & NC - 13Amp +/- 1Amp

TECHNICAL SPECIFICATIONS:

Description	PRIMA 700 / 900 / 1500
Output Voltage at No Load	220V ± 7V
Output Frequency	50Hz ± 1Hz
Output Wave Form	Sine Wave
Nominal Battery Voltage	12V / 12V / 24V



Model	
PRIMA 700	12V
Model	
PRIMA 900	12V
Model	
PRIMA 1500	24V

Ideal for Computers & Printers

● Wide Range for Battery Charging i.e. 90V to 300V in Normal Mode

Model	Volt	Length +/- 10mm	Width +/- 10mm	Height +/- 10mm	Net Weight (In Kg) +/- 0.5	Gross Weight (In Kg) +/- 1.0
PRIMA 700	12V	340	330	190	8.22	9.00
PRIMA 900	12V	340	330	190	9.52	10.30
PRIMA 1500	24V	410	405	225	16.00	17.50



Marketing Division: Plot No. 50/51, Raj Complex, Sector 19C, Opp. Yashmer Hotel Vashi, Navi Mumbai - 400703, **Head Office:** 59E Chowringhee Road, Kolkata - 700020
Delhi: 8/42 Kirti Nagar Industrial Area, Opposite MDH Spice Factory, New Delhi - 110 015
Jalandhar: Village Hajara, Opposite Vista Resort, Hoshiarpur Road, Jalandhar - 144 025
Lucknow: Exide House, KH-626, Behsa, Transport Nagar, Opposite P.A.C. Battalion, Kanpur Road, Lucknow - 226012 ● **Kolkata:** 6A, Hatibagan Road, Entally, Kolkata - 700 014 ● **Bangalore:** Exide House, KSSP Complex, Ware House-8, 12 KM, Hosur Road, Bangalore - 560 068 ● **Ahmedabad:** SF-201, 2nd Floor, Shivalik Arcade, 100 Ft. Anand Nagar Road, Prahlad Nagar, Ahmedabad - 380015 ● **Chennai:** Navin's Presidium, A Block, 4th Floor, 103A, Nelson Manickam Road, Chennai - 600 029 ● **Ranchi:** M/s. Rajendra Singh & Bros. Nr. Reliance Petrol Pump, Pandra, Kamre, Ranchi, Jharkhand - 835 222 ● **Mumbai:** Raj Complex, Behind Banking Complex, Sec. 19-C, Plot No. 50-51, Opposite Yashmer, Vashi, Navi Mumbai - 400 703

